



FULCRA

Clamp-fixed hinge for
medium and heavy doors

 **GIESSE**

FULCRA

For profiles with channel

Clamp-fixed hinge, for aluminium doors intended for medium, intensive and heavy-duty use, in accordance with European standards.



Load capacity

x2 = 120 Kg

x3 = 150 Kg



Opening

Max 180°.



Assembly

No profile machining, stainless steel fixing plates to be inserted in the channel. Installation for right- or left-hand opening takes just a few seconds.



Adjustments

Lateral = ± 2 mm / Height = 0/+3 mm / Compression = $\pm 0,5$ mm
Easily accessible directly at the hinge, using a simple Allen key, with no additional components required.



Clean design

Perfect coaxial alignment of the hinge bodies, even with maximum available side adjustment in place



Patented

Innovative adjustment system to keep the hinge bodies aligned regardless of side adjustment position.



Certification

EN 1935 (200,000 cycles).




Go to the **technical data sheet**


FULCRA

Select the right code based on the profile cross-section.


Code **00700**




Code **00702**



Code **00701**




Code **00703**




Go to **installation instruction video**
Codes **00700, 00701, 00702, 00703**


Code **00759**

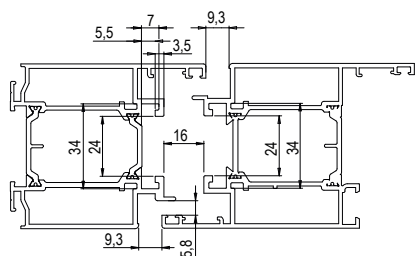

Code **00923**

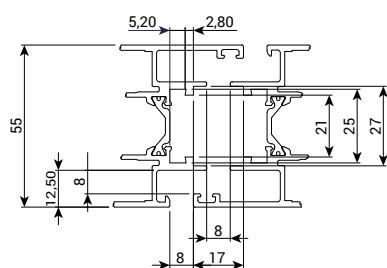

Code **00924**

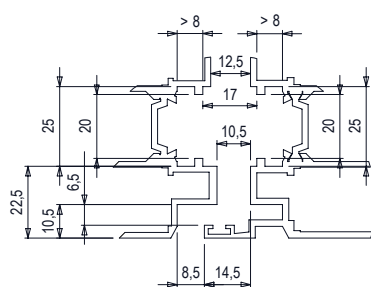

Go to **installation instruction video**
Codes **00759, 00923, 00924**

Fulcra comes with raw finish or several different options like **RAL powder paint**, **anodized paint** or **TREND special colours**.



410
RAL 9010
Pure white



682
RAL 9016
Mat white



376
Giesse silver



530
Mat gray
SFX



473
RAL 7016
Dark gray



500
RAL 9005
Black



350
Trend Cromosat



325
Trend Nickelsat



**HARDWARE
SOLUTIONS**

**EXTRUDED
SOLUTIONS**

**CUSTOM
SOLUTIONS**



HOUSTON
HEADQUARTERS



1927
FOUNDATION



7,000+
EMPLOYEES



90+
MARKETS



60+
GLOBAL LOCATIONS



Contact Us

QUANEX-INTERNATIONAL.COM
QUANEX.COM



U0903201 - 09/2026